



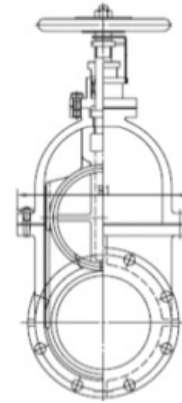

MARINE CAST STEEL HULL GATE VALVE - JIS F7360

Manufactured in accordance to JIS F7400
Flanges as per JIS B2220

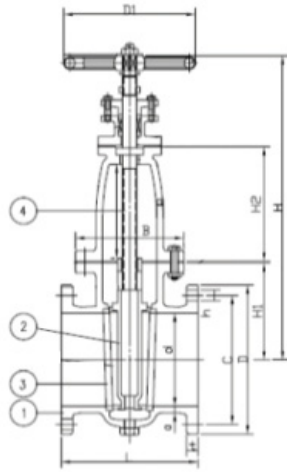

No.	Component	Material
1	Body	Cast Steel
2	Disc	Stainless Steel
3	Seat	Stainless Steel
4	Stem	Stainless Steel

Nominal dia.	Test Pressure MPa[kgf/cm ²]	
	Body	Seat
400 or less	1.47[15]	1.08[11]
450 or more	0.50[5.1]	0.25[2.5]

Size	L	D	C	No.	h	t	H	D2	Kg
50A	200	155	120	4	19	16	300	140	17.1
65A	220	175	140	4	19	18	350	160	26.5
80A	230	185	150	8	19	18	400	180	31.5
100A	250	210	175	8	19	18	450	200	44.9
125A	270	250	210	8	23	20	520	224	63.2
150A	290	280	240	8	23	22	580	250	82.3
200A	310	330	290	12	23	22	700	315	130
250A	340	400	355	12	25	24	840	400	203
300A	380	445	400	16	25	24	960	450	291
350A	420	490	445	16	25	26	1050	500	368
400A	480	560	510	16	27	28	1150	560	507
450A	450	620	565	20	27	30	1300	450	580
500A	500	675	620	20	27	30	1420	500	735
550A	550	745	680	20	33	32	1550	500	930
600A	600	795	730	24	33	32	1650	500	1120
650A	650	845	780	24	33	34	1750	560	1330
700A	700	905	840	24	33	34	1850	560	1590
750A	750	970	900	24	33	36	1950	630	1950
800A	800	1020	950	28	33	36	2050	630	2260